




EasyClick PCTM
DO IT YOURSELF POLYCARBONATE PANELS

DIY Polycarbonate Roof Panels

- Easy DIY installation
- No specialist tools required
- Light weight
- Impact resistant

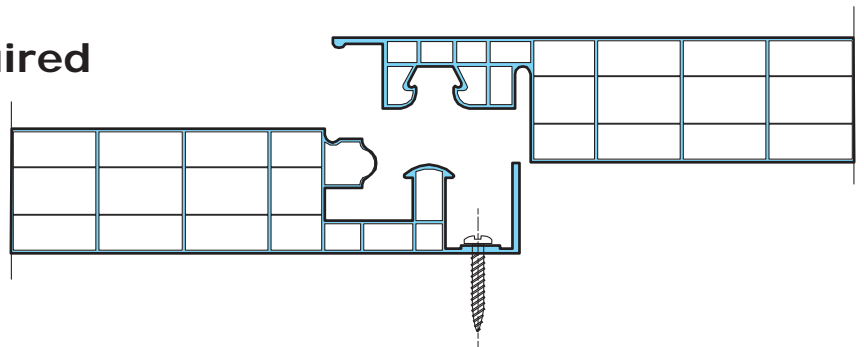

PROUDLY AUSTRALIAN OWNED



EasyClick PC is an ideal option for glazing and roofing in Patios, Greenhouses, Carports, Pool Enclosures, Office Partitions and more. EasyClick PC is the perfect product for the home handyman.

Assembly of EasyClick PC is so simple that it can easily be installed with standard tools. Cut panels to desired length, screw in place, snap in next panel and repeat, finish with aluminium EasyClick PC End Cap.


It's 4 wall construction is thermally efficient and offers high light transmission. Acting like a sunblock, it is opaque to UV rays, protecting patio furniture, vehicles, etc. from the harmful effects of the sun.




DIY Polycarbonate Roof Panels

Installation Guide


- Easy Handling
- Light Weight
- Quick Assembly
- Outstanding Light Transmission with UV protection
- Thermally Efficient 4-wall construction
- Strong
- Highly Impact Resistant
- Waterproof




1 Cut to the required size.

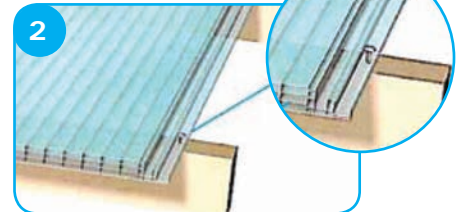

2 Secure the panel onto each batten with a screw.

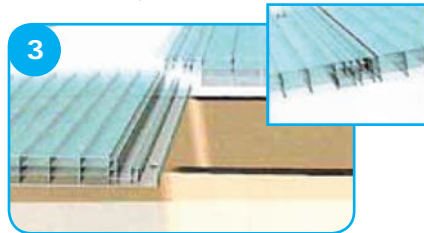

3 Match the next sheet edges carefully and press into place with a "click."

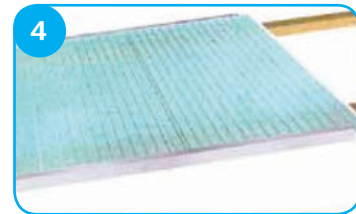



4 Apply a border of aluminum EasyClick PC End Cap, in conjunction with a bead of Polycarbonate compatible sealant to finish the edges.

EasyClick PC SPECIFICATIONS

Thickness	16mm
Width	250mm
Lengths	2.0, 2.5, 3.0, 3.5, 4.0, 4.5, 5.0, 5.5, 6.0, 7.0m
Colours	Clear, Opal, Grey
UV Protection	One Side
Light Transmission	Clear – 80%, Opal – 50%, Grey – 40%
Shade Factor	Clear – 2, Opal – 6, Grey – 7 <small>Shade factors shown provide an indication of the heat absorbed or reflected by the EasyClick sheet. The 4 walls and hammered glass finish provide exceptional performance in comparison with single layered sheeting.</small>
Thermal Insulation	U = 2.1 W/m2K
End Cap Lengths	3.0m and 6.0m
Screws	Wafer 25mm C3 T17 Timber Wafer 22mm C3 Tek Steel
Shade Factor Key	0 = Full Light, 10 = Full Shade

EasyClick PC LOADING DATA

Distance: Max. 1200mm between battens
Fall: Min. 5°

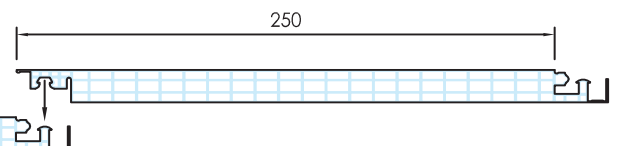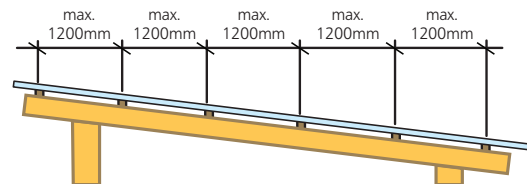

EasyClick PC Profile



For more information on full warranty details, new products or installation instructions, please visit www.ampelite.com.au

Ampelite is proudly Australian owned. Profits remain in Australia and taxes paid benefit our community.



Ampelite Australia Pty Ltd
ABN 91 487 122 629

Plumbing Merchants Association
Supplier Of The Year for
2006, 2007, 2008, 2009, 2011 & 2014



VIC & TAS: Tel 03 8710 9110. Fax 03 9794 0710. **NSW & ACT:** Tel 02 9625 7200. Fax 02 9625 7211.
QLD: Tel 07 3382 8300. Fax 07 3200 8703. **NTH QLD:** Tel 07 4774 5007. Fax 07 4774 7898
SA & NT: Tel 08 8260 7391. Fax 08 8260 7397. **WA:** Tel 08 9302 6833. Fax 08 9302 6855.
NZ: Tel 09 634 5366. Fax 09 622 2060.

www.ampelite.com.au



Quality System
Quality Endorsed Company
AS/NZS ISO 9001
QEC 4787
SAI GLOBAL