



Be ahead



PHOBOS BT A



24V electromechanical swinging gate operator for residential use with magnetic limit switches.


CODE	NAME	DESCRIPTION
P935096 00002	PHOBOS BT A25	24V electromechanical operator for swinging gates up to 2.5m in length and 400Kg. Manoeuvre in 15sec and magnetic limit switches.
P935095 00002	PHOBOS BT A40	24V electromechanical operator for swinging gates up to 4m in length and 500Kg. Manoeuvre time in 20sec and magnetic limit switches.

THALIA LIGHT MAIN FEATURES



- Control board with an LCD display and removable terminal blocks with new standard colour-coding;
- Possibility to manage a single or double electromechanical swinging gate motor;
- Dual channel receiver;
- Possibility to set the auxiliaries as SCA (Gate Open Light), magnetic lock, electric lock, alarm, stair light, courtesy light, zone light, flashing light, monostable radio channel;
- Slowdown during opening and closing;
- D-Track anti-crushing technology embedded;
- U-Link interconnectivity protocol embedded;
- Beba slot that allows the user and the installer to remotely control the gate motor with smartphones and laptops.

KIT COMPONENTS

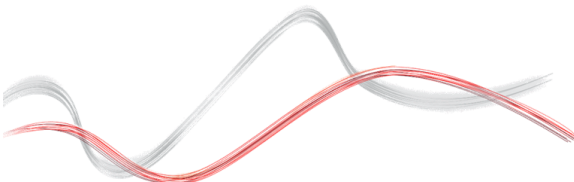

BFT Automation Sydney Branch
 29 Bentley St, Wetherill Park, NSW 2164
 T (+61 2) 9757 0677 - F (+61 2) 9725 4225
 www.bftaustralia.com.au
 info@bftaustralia.com.au

BFT Automation Melbourne Branch
 Unit 18 191-195 Greens Road, Dandenong South 3175
 T (+61 3) 9793 1070 - F (+61 3) 9793 2243
 www.bftaustralia.com.au
 info@bftaustralia.com.au

	PHOBOS BT A25	PHOBOS BT A40
Control board	Thalia Light	Thalia Light
Motor power	40W	40W
Useful Rod Stroke	290mm	400mm
Maximum Angle	116°	124°
Type of limit switches	Magnetic	Magnetic
Slowdown	Yes	Yes
Manual Release	Personalised key	Personalised key
Frequency of use	Residential	Residential
Environmental conditions	From -20° C to +55° C	From -20° C to +55° C
Protecting rating	IPX4	IPX4

ACCESSORIES

	CODE	NAME	DESCRIPTION
	N733427	ARB PHOBOS N	Front and rear adjustable brackets for Phobos BT A25 and Kustos BT A25 range
	N733428	ARB PHOBOS NL	Front and rear adjustable brackets for Phobos BT A40 and Kustos BT A40 range
	D111761	ME BT	Control board for 24Vac solenoid lock for 24V automatic system.
	P111494	BEBA WI-FI GATEWAY	Wi-Fi expansion card to control the automation through smartphones and laptops via Wi-Fi, 4G or TCP/IP. Wi-Fi signal required at the gate motor.
	D111906	MITTO B RCB04 R1	Transmitter with 4 channels. Range 50/100m and power supply 12V with one battery type 23 A.
	N999629	MITTO B RCB04 RAINBOW	Pack of four Mitto transmitters with 4 channels in four different colours. Range 50/100m and power supply 12V with one battery type 23 A.
	P121024	Q.BO TOUCH	Wireless digital keypad 433Mhz rolling code.
	P121025	Q.BO PAD	Vandal proof hard-wired keypad for outdoor use thanks to the metal structure and the stainless-steel buttons. Beba Wiegand required (P111467) for Wiegand connection.
	P111536	AKTA A30	Pair of hard-wired photocells with the possibility to adjust the beam 180° horizontally and 20° vertically. Range 30m and power supply 24V AC/DC.
	P111537	ERIS A30	Pair of wireless photocells with the possibility to adjust the beam 180° horizontally and 20° vertically. Range 30m and power supply 24V AC/DC.
	P125020	BBT BAT	Set of batteries backup for Thalia L and Thalia P.
	MAGLOCK600	MAG LOCK 600	12 - 24V DC front or side magnetic lock with a holding force of 600Kg.
	VIRO 24V AC	VIRO 24V AC	24V AC electric lock.

